


# BARIX

## Annunicom MPI400


Intercom / Paging device with contact closure inputs, relay outputs, Line and Mic / Speaker support.

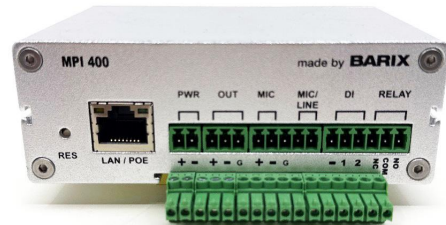

The MPI400 is a versatile Audio over IP device designed to serve as an end point or gateway between IP based intercom (VoIP/SIP or streaming) and traditional paging/intercom systems, microphone/speakers or an amplifier.

The modern, robust & powerful hardware/software architecture provides a future proof platform that meets modern internet security requirements and can easily be adapted to individual customer needs.

A wide variety of audio environments, such as Dante®, SIP, InformaCast and Syn-Apps are supported. Codecs include PCM, AACplus, MP3, OPUS, G.711, G.722 that can be streamed using HTTP and RTP. Audio files can be stored on the internal memory and their playback can be triggered via a simple UDP command or scheduled. Thanks to the priority handler, the Annunicom MPI400 can be configured to switch between sources according to one of the five priority settings and therefore eliminates the need for an audio matrix device.

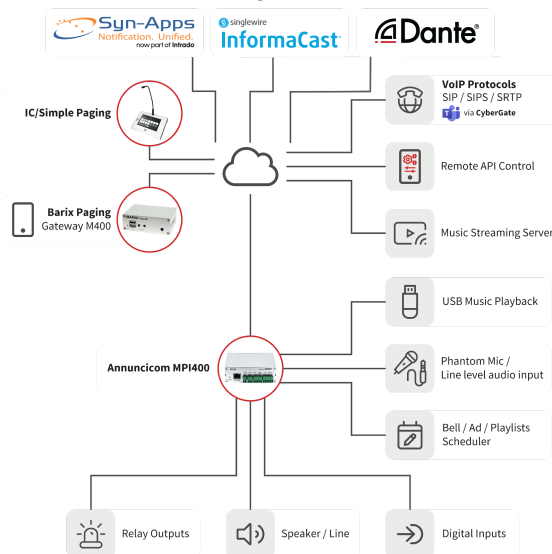

### Applications

- Paging / intercom device with talkback for classrooms or factory buildings.
- Door Intercom station
- Paging/ intercom endpoint for public transportation
- Help Point/SOS call box device
- Generic, bidirectional half and full-duplex VoIP module for Paging and Intercom applications
- IP based Audio Surveillance
- Digital Annunciator, Message Player
- VHF Radio interface to IP networks
- Dante® support - requires extra license
- MS Teams endpoint via CyberGate service

### Features

- SIP VoIP client support
- IP Streaming via HTTP, UDP, RTP, Multicast, Uni- or Broadcast
- Variety of Audio codecs supported (e.g. AAC+, MP3, PCM, G.711, G.722, OPUS ...)
- Internet security supported (HTTPS, SRTP, SIPS)
- Low voltage Relay Outputs (2) for example to activate amplifier upon SIP call received
- Dry Contact Inputs (2), expandable via USB for example to establish a connection or to select a target
- Microphone Inputs (2x)
- Line Level Input (mono, unbalanced)
- Audio Output (mono, balanced) or amplified output 1W @8 Ohm
- PoE and 24VDC redundancy powered

# Technical Specifications

## CPU / Memory

- Barix IPAM400 Processor Module
- Quad-Core ARM Cortex™ -A7
- 256 MB DDR3 SDRAM
- 16 MB SPI Flash

## Operating System

- Embedded Linux based on Yocto

## Power interface

- 24 VDC, +/- 20%, 12 Watt max. on detach. screw terminal block
- IEEE 802.3af PoE

## Network Interface

- 10/100Mbps auto-sensing
- RJ-45 connector with integrated Link /Activity LED
- IPv4/IPv6 capable

## Protocols

- TCP/IP, HTTP, UDP, RTP, SIP, DHCP, Multicast capable
- Dante® Support - Requires extra license
- Singlewire InformaCast compatibility - requires extra license
- SynApps Revolution compatibility

## USB Interface

- 2x USB 2.0 type A interfaces

## Discrete I/O

- On detach. screw terminal block:
- 1x Normally open relay 30V 0.5A
- 1x Normally closed relay 30V 0.5A
- 2x digital dry contact inputs

## Audio input interfaces

- On detach. screw terminal block:
- Line level input +4dBu max, mono, unbalanced
- Microphone input, balanced, 18V phantom powered
- Microphone input, electret, unbalanced, 2.1V bias

## Audio Output Interfaces

- On detach. screw terminal block:
- Audio output (mono), suitable to drive a speaker or a balanced output (exclusive output). Speaker: 1W @8ohms
- Line out: symmetric/balanced, non-isolated, with DC offset, 10dBu (unbalanced: 4dBu) volume level software controlled
- 3.5mm headphone output

## IP Audio formats

- FDx/HDX SIP client support
- HTTP(S) and (S)RTP Streaming
- Large variety of codecs can be supported (e.g. MP3, PCM, G.711, G.722, AAC+, OPUS)

## User Interface

- Web interface for configuration
- 2 x Multicolor LED Status indicators
- Reset & Factory Defaults Button

## Mechanical

- Aluminum case, 265 g
- Dimensions 108 x 38 x 78.7mm (4.25 x 1.5 x 3.1 inch) rack and wall mountable using accessories

## Warranty

- Two years

## Environmental

### Operating Environment

0 to +50°C / 32 to 122°F  
0 - 70% relative humidity, non-condensing

### Storage Conditions

-20 to +70°C / -4 to 158°F  
0 - 70% relative humidity, non-condensing

## Ordering Information

2021.9330P MPI400 package

2022.9372P InformaCast Package  
2019.3160 InformaCast License  
2023.9413P Annunicom MPI400 Dante® – Including Dante® license  
2023.9414P – Annunicom MPI400 Dante® + InformaCast – Including Dante® license + Singlewire's InformaCast license  
2011.5032 Accessories Power supply 24VDC  
2006.9072 Accessories Wall mount bracket  
2007.9082 Accessories 19" Rack mount

## Certifications

CE, RoHS, FCC

## Barix AG

Limmatstrasse 21, 8005 Zürich, Switzerland  
Phone: +41 434 33 22 11  
[www.barix.com](http://www.barix.com)



© Barix AG 2021, all rights reserved. All information is subject to change without notice.  
All mentioned trademarks belong to their respective owners and are used for reference only. Product Sheet V1.0

[Direct Link](#)



For commercial related questions (distributors contacts, price list, business opportunities) please contact: [sales@barix.com](mailto:sales@barix.com)



For technical inquiries (problem reports, request for documentation, etc.) please contact: [support@barix.com](mailto:support@barix.com)