

**SPEC SHEET**

**DYNAUDIO**

**LYD 48**

# Specs

## Speaker

Max. SPL (1m, pair)	112 dB
Bass principle	Bass reflex, rear port
Crossover frequency	460 Hz / 5.5 kHz
Tweeter	1 in soft dome
Midrange	4 in
Woofers	8 in
Dimensions (W x H x D mm / in)	369 x 234 x 328 mm / 14.5 x 9.2 x 12.9 in
Weight	12 kg

## Amplifier

Power (tweeter/midrange/woofer)	50 W/50 W/80 W
Power consumption standby	<0.5 W
Power consumption max.	100 W
Input voltage	90 - 264 V AC, 50 - 60 Hz
Inputs	XLR balanced / RCA unbalanced
Outputs	N/A



## Sensitivity (85 dB @ 1m, free field)

0 dB	100 mV
------	--------




## Frequency response -6 dB limits

Bass extension -10 Hz	40 Hz - 21 kHz
-----------------------	----------------

# Specs

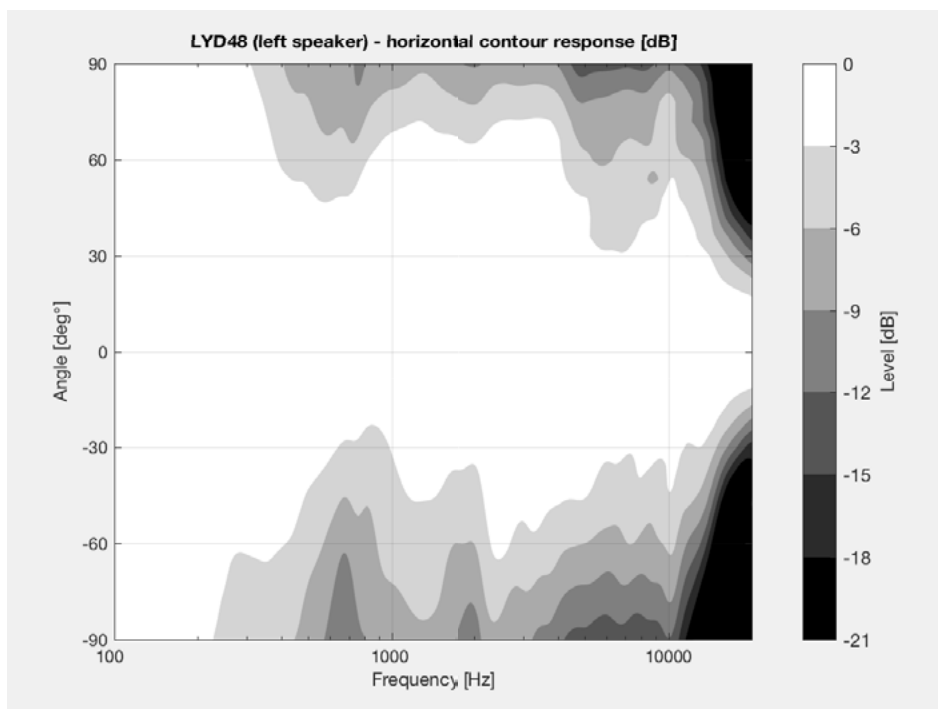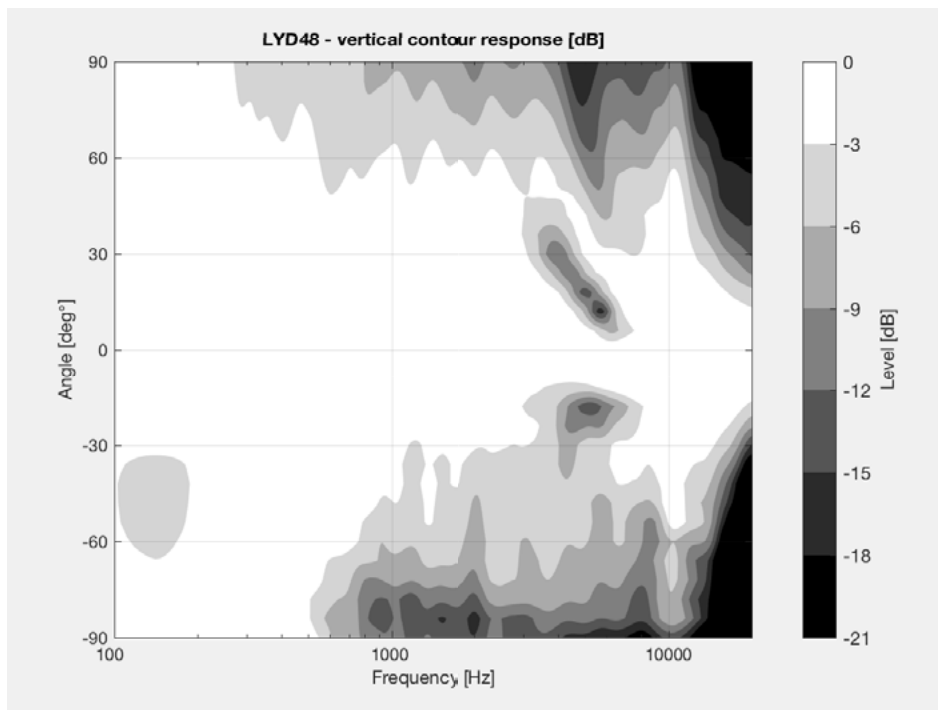

# Specs

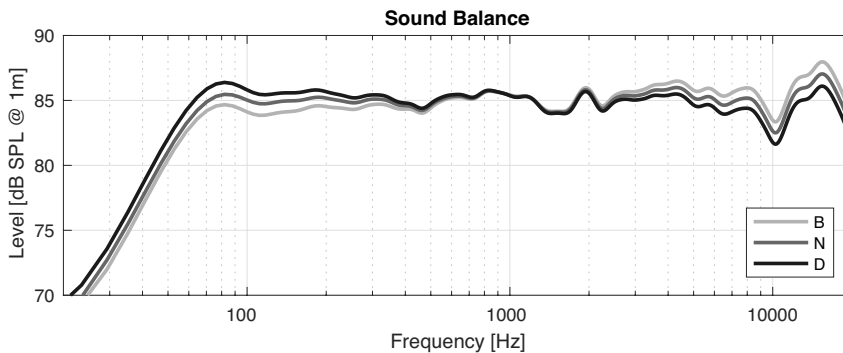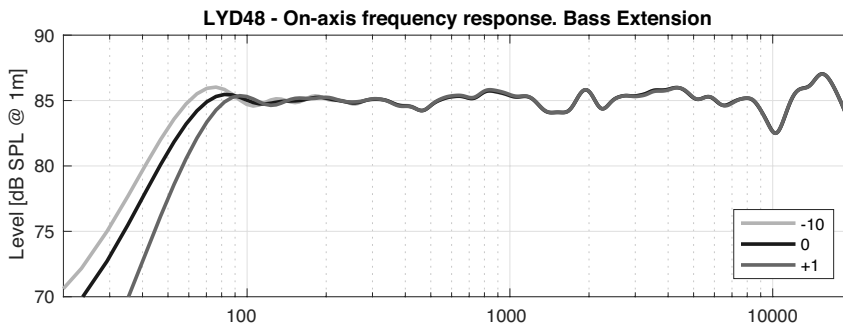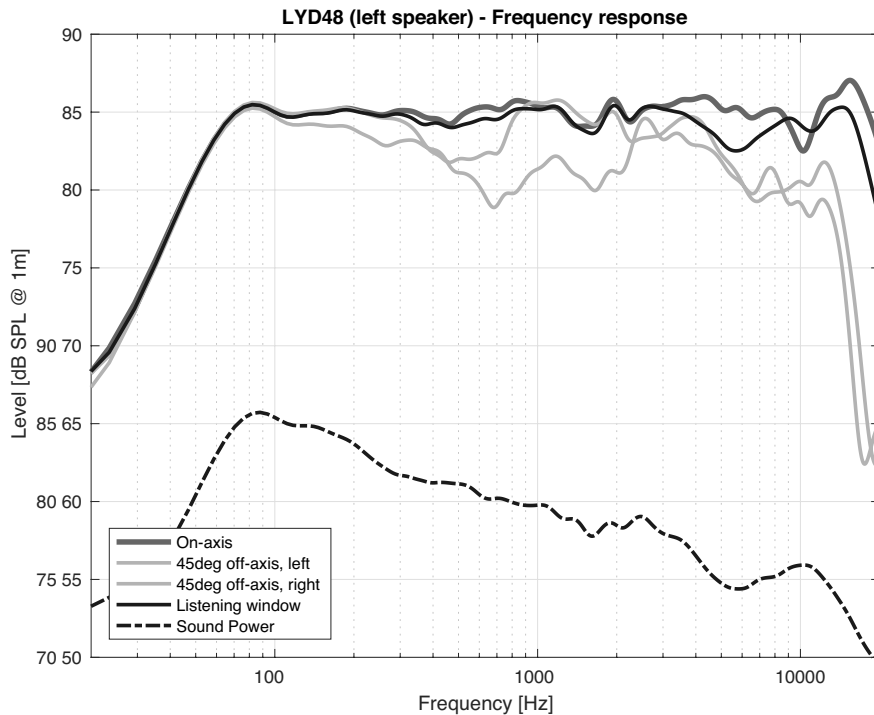

**DYNAUDIO**